



Earth Rod(Flat Clipper Jaws)

Item number:23001

Maximum opening (mm):32

Maximum section area of grounding wire (mm²):50

Notes:

- 1.Applicable aluminium and copper bus –bar and switch gear cabinet.
- 2.Provide length 1m,2m,3m
- 3.Short cut grounding wire and grounding pole need to order additionally.



Earth Rod(Arc Opening)

Item number	Model	Maximum section area of grounding wire (mm ²)
23011	VI	35
23012	VIII	50

Notes:

1. Adapt for transmission line .
2. Provide length :1m,2m,3m,4m
3. Need to purchase short cut grounding wire and grounding pole additionally.



Personal Safety Grounding Wire

Item number	Model	Maximum section area of grounding wire (mm ²)	Number of wire clip (piece)	Grounding length (mm)
23021	Three-phase	16	3+1	3×0.9+0.9
23031	Single phase	25	1+1	3

Uses:To prevent worker from getting an faradism shock on the dead line, serve as auxiliary safeguard to prevent the unexpected electric shock, protect the worker's life safety.applicable for various voltage rate,forbid grounding with safety grounding wire,electric inspection grounding security circuit.

Feature:It is needless to clip conductor manual,just adopt auto clip conductor by falling clip to conductor with nylon, while need to disassemble only lift up.



Grounding Wire and Short Circuit Wire

Item Number		Copper wire section (mm ²)	Protection layer thickness (mm)
Triphase	Single Phase		
23041	23041A	16	1.0
23042	23042A	25	1.0
23043	23043A	35	1.0
23044	23044A	50	1.2

Notes:

- 1.Used to temporary short and grounding for dead line equipment and circuit, prevent the accidental damage to operator and equipment.
- 2.Should confirm single phase or triphase before placing order.



Grounding Pole and Grounding Clip

Item number	Product name	Uses
23051	Grounding pole	Matched with earth rod
23055	Grounding end clip	

Notes:

- 1.Used to temporary short and grounding for dead line equipment and circuit, prevent the accidental damage to operator and equipment.
- 2.Should confirm single phase or triphase before placing order.



Safety Harness

Item number	Product name	Load(kg)	Remarks
23061	Band safety belt	100	Band Type
23062	Rope safety belt	100	Rope Type
23063	Double shoulder harness	100	Rope Type
23064	Full body harness	100	Band Type






Wire Rope Falling Protector

Item number	23105-3	23105-5	23105-7	23105-10	23105-15
Model	TS-3	TS-5	TS-7	TS-10	TS-15
Radius (m)	3	5	7	10	15
Action force (N)	<25	<30		<40	
Capacity (kg)	100				
Brake distance (m)	≤ 0.2				
Service life (times)	>20000				
Weight (kg)	1.75	2.3	3.1	3.82	6.2




Road Isolation Fence

Item number	Specification	Feature
23083	Width:0.3~3.2m(can be adjusted) Dimension:0.30x0.63x0.90m Weight:12kg	Folding Type

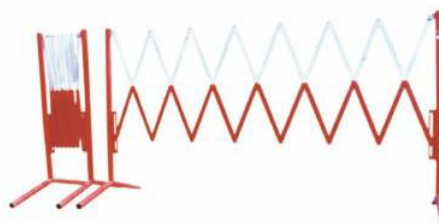

Safety Fence and Red-White Belt

Item number	Product name	Remark
23091	Safety fence	1m height,use together with Red-white belt
23095	Red-White Belt	Polyamide fiber woven

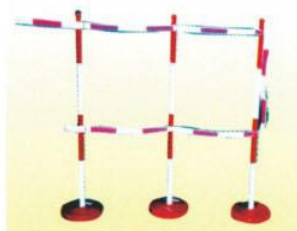

Traffic Road Cones

Item number	Model	Height (mm)	Remark
23102	B type	500	
23103	C type	500	Paste glisten film

Notes:

- 1.Used to temporary short and grounding for dead line equipment and circuit, prevent the accidental damage to operator and equipment.
- 2.Should confirm single phase or triphase before placing order.



High Voltage Electroscop

Item number	Voltage class (kV)	Effective insulation length(mm)	Starting voltage(kV)
23106	10	≥700	≤3
23107	35	≥900	≤12
23108	110	≥1300	≤30
23109	220	≥2100	≤60

Uses:Used for testing the power frequency voltage on alternating high voltage line and electrical equipment.

